

## C92

### PROFILE

Powered by Intel CPU, Centerm C92 is designed to support CPU-intensive and graphic demanding applications delivering smooth and outstanding performance in the standalone and virtual desktop environment.

### FEATURES

➤ **Powerful SoC performance**

New generation Intel CPU drives up to superior digital media performance and rich HD entertainment.

➤ **Low TCO Solution**

Low price, low power consumption and centralized management greatly reduces TCO.

➤ **Dual display supported**

➤ **Multiple VDI protocol supported**

Widely supports Citrix ICA/HDX, VMware PCoIP and Microsoft RDP.


➤ **Environment friendly**

Low CO2 emission, low heat emission, noise-free and space saving.



### Connectivity

1. Power Button
2. Mic-in
3. Line-out
4. DVI-I Port

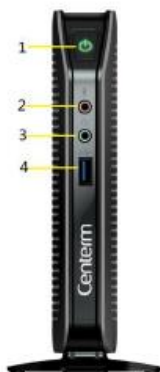


Front Side



Rear Side (without wifi)

1. DC 12v input
2. USB 2.0 Port
3. RJ-45
4. DVI-I Port
5. DP Port
6. USB 2.0 Ports

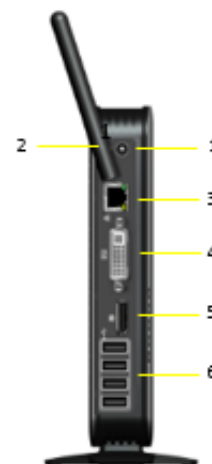

Rear Side (with wifi)

1. DC 12v input
2. Wifi Antenna
3. RJ-45
4. DVI-I Port
5. DP Port
6. USB 2.0 Ports

## SPECIFICATION

## SYSTEM

Processor	Intel Dual-Core 2.41Hz or Intel Quad-Core 2.0GHz
Available Operating System	WES7 / WES8 / WIN 10 IOT / COS ①
VDI/HSD Support	Citrix Receiver / VMware view / Microsoft RDP 8 Compatible
Management	CCCM

## MEMORY

RAM (DDR3L)	2GB ( Max up to 8GB)
Storage (SSD)	8GB ( up to 128GB SSD)

## DISPLAY

Port	DVI-I x 1 (DVI-to-VGA adapter included) , DP x 1
Resolution	DVI-D Up to 1920x1200 @ 60Hz, VGA / DP Up to 2560x1600 @ 60Hz
Color Depth	32 bits
Dual Display	Support

## NETWORK

LAN	x 1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
WLAN	Optional Mini PCI-E wireless (only 4 USB2.0 ports at the rear in such case )

## I/O PERIPHERAL INTERFACE

USB 2.0	Rear: x 5 (No Wifi), or x 4 (With Wifi)
USB 3.0	Front: x 1

## AUDIO

Ports	Front: Line-out x 1 , Mic-in x 1, (1/8-inch mini jack)
-------	--

## DIMENSION

Device (H x W x D)	131mm x 31.5mm x 167mm
Packaging	488mm x 256mm x 108mm
Net Weight	0.55 kg

## POWER

Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC
Power Consumption	< 10w

## MOUNTING

VESA Bracket	VESA Mounting Kit
Kensington Lock	Built-in Kensington security slot

## ENVIRONMENT

Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

①: Centerm Operating System (Linux).