

## D560

Build No. 20180803

### PROFILE

D560 is a cost efficient and energy saving alternative to PCs, which delivers rich multimedia capabilities and PC-like user experience; as well as a security solution for sensitive computing environments and giving businesses a layer of protection for company data with Trusted Platform Module (TPM).

### FEATURES

➤ **Cost-effective**

Low price and high performance with AMD CPU

➤ **Multiple interfaces**

4 serial port, 1 parallel port, 2 USB 3.0 port, 4 USB 2.0 port, 1 DVI-I port and 1 M.2 port

➤ **Multiple VDI protocol supported**



Widely support Citrix ICA/HDX, VMware PCoIP and Microsoft RDP.

➤ **Built with Security in Mind**

Trusted platform module (TPM) which is an integrated cryptographic security chip that ensures only authorized access to networks under the certification requirements of the Trusted Computing Group.



### Connectivity

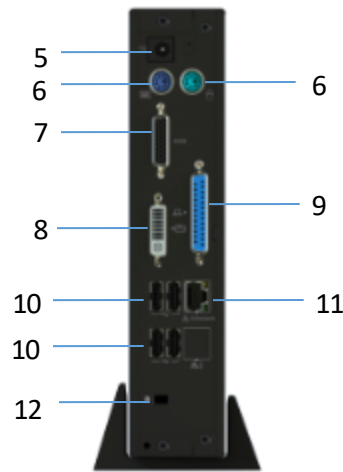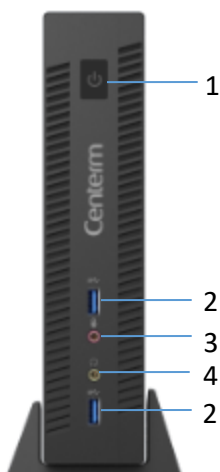

1. Power button
2. USB 3.0 Port
3. Mic-in
4. Line-out
5. DC 19V input
6. PS/2 Ports
7. Serial Port
8. DVI-I Port
9. Parallel Port
10. USB 2.0 Port
11. RJ-45
12. Kensington Lock Slot

## SPECIFICATION

## Standard Configuration

SYSTEM	
Processor	AMD A8-7600 quad core 3.1GHz
Available Operating System	WES7 / WES8 / Win 10 IOT
VDI/HSD Support	Citrix Receiver / VMware View Client / Microsoft RDP 8
Management	CDMS
MEMORY	
RAM (DDR3)	4GB
Storage (SSD)	64G MSATA;
DISPLAY	
DVI	x 1 (VGA Convertor included)
Resolution	1920x1200@ 60Hz
Color Depth	32 bits
NETWORK	
LAN	x1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
I/O PERIPHERAL INTERFACE	
USB 2.0	x 4 (rear)
USB 3.0	x 2 (front)
Serial Port	x 1 (extensible to 4 via cable)
Parallel port	x 1
PS/2	x 2
AUDIO	
Ports	Line-out x 1 , Mic-in x 1
DIMENSION	
Device (including the stand)	206mm x 83mm x 223mm
Packaging	483mm x 286mm x 115mm
Net Weight (including the stand)	1.438 kg
POWER	
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 19V/4.74A DC
Power Consumption	Desktop mode: 22.2w, Full-load mode: 61.9w
MOUNTING	
Stand	Vertical feet stand
Kensington Lock	Built-in Kensington lock slot
ENVIRONMENT	
Cooling	Fan convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

## SPECIFICATION

## Optional Configuration

Memory	Up to 16GB (2 slots)
Storage	SSD: up to 512GB 1 x internal HDD: up to 1 TB Dual storage (HDD+SSD) supported M.2 SSD up to 128GB
Display	1 x DP port (up to 4096X2160 @60Hz) Dual display: supported (extended mode) Triple display: supported (extended mode)
Network	Additional 1 x (10/100/1000 Base-T Fast Ethernet, RJ-45) 1 x Mini-PCIE wireless module
Mounting	VESA mounting kit
TPM Module	X1