

D610

PROFILE

D610 is a highly efficient and powerful thin client for both local computing and Microsoft, Citrix, VMware virtual desktop environments. It has a zero-client style desktop with COS or a Windows style desktop with WES.

FEATURES

➤ **Cost-effective**

Low price and high performance with intel Dual core CPU.

➤ **High reliability, No moving parts**

MTBF 40,000 hours, fanless cooling.

➤ **Low power consumption**

A green product with low power consumption and low CO2 emission.

➤ **Multiple interfaces**


4 serial port, 1 parallel port, 1 USB 3.0 port, 5 USB 2.0 port, DVI-I port.

➤ **Multiple VDI protocol supported**

Widely supports Citrix ICA/HDX, VMware PCoIP and Microsoft RDP.



Connectivity

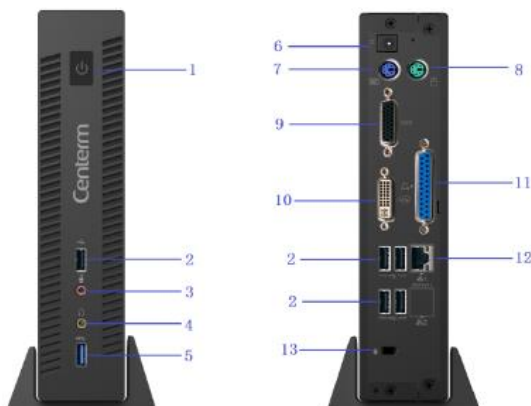

- | | |
|------------------|--------------------------|
| 1. Power Button | 8. PS/2 Mouse |
| 2. USB 2.0 Port | 9. Serial Port |
| 3. Mic-in | 10. DVI-I Port |
| 4. Line-out | 11. Parallel Port |
| 5. USB 3.0 Port | 12. RJ-45 |
| 6. DC 12V Input | 13. Kensington Lock Slot |
| 7. PS/2 Keyboard | |

SYSTEM	
Processor	Intel Dual-Core 2.41GHz
Available Operating System	WES7 / WES8 / WIN 10 IOT / COS ①
VDI/HSD Support	Citrix Receiver / VMware view / Microsoft RDP 8 Compatible
Management	CCCM
MEMORY	
RAM (DDR3)	2GB (Max up to 8GB)
Storage (SSD)	8GB (up to 128GB SSD or optional HDD)
DISPLAY	
Port	DVI-I x 1 (DVI-to-VGA adapter included) , DP x 1 (optional)
Resolution	DVI-D Up to 1920x1200 @ 60Hz, VGA / DP Up to 2560x1600@60Hz
Color Depth	32 bits
Dual Display	Support
NETWORK	
LAN	x1 (10/100/1000 Base-T Fast Ethernet, RJ-45), optional x1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
WLAN	Optional Mini PCI-E wireless
I/O PERIPHERAL INTERFACE	
USB 2.0	x 5 (front x 1, rear x 4)
USB 3.0	x 1
Serial Port	x 1 (expended to 4 via cable; up to 6)
Parallel port	x 1
PS/2	x 2
AUDIO	
Ports	Front: Line-out x 1 , Mic-in x 1, (1/8-inch mini jack)
DIMENSION	
Device	206mm x 48mm x 215mm
Packaging	483mm x 286mm x 115mm
Net Weight	1.2 kg
POWER	
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC
Power Consumption	< 14w
MOUNTING	
Stand	Vertical feet standard
Kensington Lock	Built-in Kensington Lock Slot
ENVIRONMENT	
Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

①: Centerm Operating System (Linux).