

## D620

Build No. 20181030

### PROFILE

D620 is a highly efficient and powerful thin client for both local computing and Microsoft, Citrix, VMware virtual desktop environments. It has a zero-client style desktop with TOS or a Windows style desktop with WES.

### FEATURES

➤ **Real 4K display**

DP option could support resolution rate up to 4K

➤ **Triple display supported**

Benefit for task with multi-monitors required

➤ **Multiple interfaces**

4 serial port, 1 parallel port, 2 USB 3.0 port, 4 USB 2.0 port, DVI-I port.

➤ **Multiple VDI protocol supported**


Widely supports Citrix ICA/HDX, VMware PCoIP and Microsoft RDP

➤ **Trusted Platform Module**

Giving businesses a layer of protection for data from penetration



### Connectivity

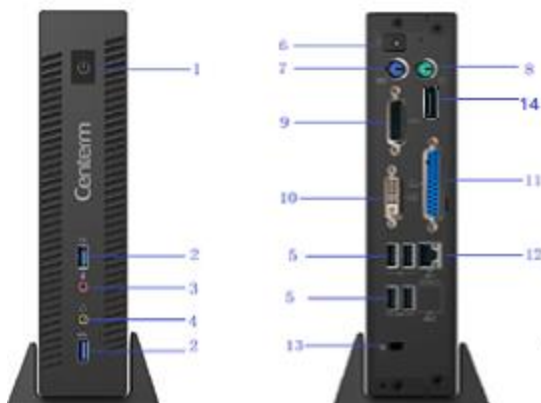

- |                  |                          |
|------------------|--------------------------|
| 1. Power Button  | 8. PS/2 Mouse            |
| 2. USB 3.0 Port  | 9. Serial Port           |
| 3. Mic-in        | 10. DVI-I Port           |
| 4. Line-out      | 11. Parallel Port        |
| 5. USB 3.0 Port  | 12. RJ-45                |
| 6. DC 12V Input  | 13. Kensington Lock Slot |
| 7. PS/2 Keyboard | 14. DP port              |

## Standard Configuration

SYSTEM	
Processor	Intel Quad-Core 1.5Ghz
Available Operating System	WIN 10 IOT / TOS ①
VDI/HSD Support	Citrix Receiver / VMware view / Microsoft RDP 8 Compatible
Management	CDMS
MEMORY	
RAM (DDR4)	4GB
Storage (SSD)	32GB
DISPLAY	
Port	DVI-I x 1 (DVI-to-VGA adapter included) 1 x DP port Triple display: supported (extended mode)
Resolution	DVI-D Up to 1920x1200 @ 60Hz, DP up to 4096x2160 @60Hz
Color Depth	32 bits
Dual Display	Supported
NETWORK	
LAN	x1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
I/O PERIPHERAL INTERFACE	
USB 2.0	x 4
USB 3.0	x 2
Serial Port	x 1 (extensible to 4 via cable)
Parallel port	x 1
PS/2	x 2
AUDIO	
Ports	Line-out x 1 , Mic-in x 1
DIMENSION	
Device / Packaging	206mm x 48mm x 215mm / 206mm x 83mm x 223mm
Net Weight	1.18kg
POWER	
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC
Power Consumption	< 14w
MOUNTING	
Stand	Vertical feet standard
Security	Standard Kensington anti-theft keyhole
ENVIRONMENT	
Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

①: Terminal Operating System (Linux).

## SPECIFICATION

## Optional Configuration

Memory	Up to 32GB
Storage	SSD: up to 128GB M.2 storage up to 128GB 1 x internal HDD: up to 1 TB Dual storage (HDD+SSD) supported
Network	Additional 1 x (10/100/1000 Base-T Fast Ethernet, RJ-45) 1 x Mini-PCIE wireless module
Mounting	VESA mounting kit
Serial Port	Extensible to 6