

F620

Build No. 20181224

PROFILE


Powered by Intel CPU, Centerm F620 is designed to support CPU-intensive and graphic demanding applications delivering smooth and outstanding performance in the standalone and virtual desktop environment.

FEATURES


- **Real 4K display**
DP option could support resolution rate up to 4K
- **Triple display supported**
Benefit for task with multi-monitors required
- **M.2 expansion**
Support M.2 storage attached for a faster I/O.
- **Multiple VDI protocol supported**
Widely supports Citrix ICA/HDX, VMware PCoIP and Microsoft RDP
- **Trusted Platform Module**
Giving businesses a layer of protection for data from penetration




Connectivity

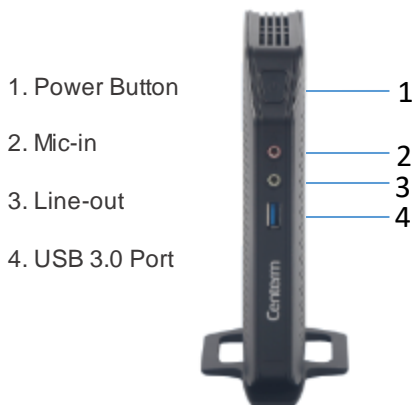

Front Side

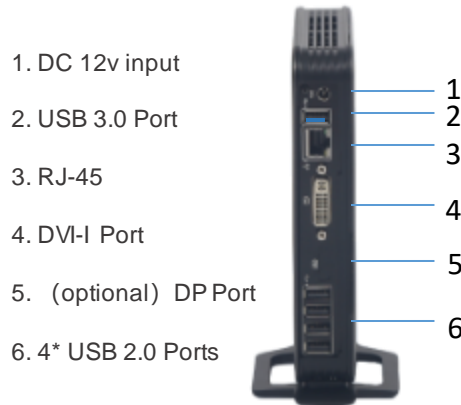

Rear Side (without Wi-Fi)

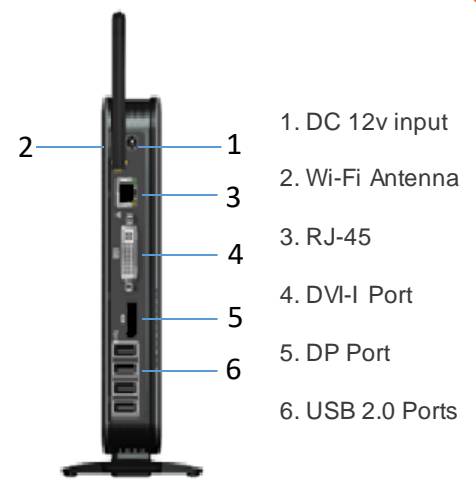

Rear Side (with Wi-Fi)

SPECIFICATION

Standard Configuration (No Wi-Fi)

SYSTEM	
Processor	Intel quad- core 1.5Ghz / dual-core 2.0Ghz
Available Operating System	WIN 10 IOT / TOS ①
VDI/HSD Support	Citrix Receiver / VMware view / Microsoft RDP 8 Compatible
Management	CDMS
MEMORY	
RAM (DDR4)	4GB (up to 8 GB)
Storage (SSD)	32GB (up to 128GB) M.2X1(up to 128GB,optional)
DISPLAY	
Port	DVI-I x 1 (DVI-to-VGA adapter included) , DP x 1
Resolution	1920x1200 (DVI) / 4096X2160 (DP)
Color Depth	32 bits
Dual Display	Supported
Triple Display	Supported
NETWORK	
LAN	x 1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
WAN	Optional M.2 (only 1 USB3.0 ports at the rear in such case)
I/O PERIPHERAL INTERFACE	
USB 2.0	x 4
USB 3.0	x 2
AUDIO	
Ports	Front: Line-out x 1 , Mic-in x 1, (1/8-inch mini jack)
DIMENSION	
Device (H x W x D)	131mm x 31.5mm x 167mm
Packaging	488mm x 256mm x 108mm
Net Weight	0.55 kg
POWER	
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC.
Power Consumption	< 10w
MOUNTING	
VESA Bracket	VESA Mounting Kit
Kensington Lock	Built-in Kensington security slot
ENVIRONMENT	
Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

①: Terminal Operating System (Linux).