

N610

PROFILE

N610 All-in-One thin client is the perfect replacement of PC plus monitor solution adopting high performance Intel processor, big 18.5" LCD screen and elegant design.

FEATURES

Professional operating system

Installed with Centerm professional WES7 cloud client operating system, secure and reliable, simple and easy to use

> VDI Support

Supports Citrix, VMware and Microsoft virtualization solutions and offers smooth user experience

Leading the All-in-One Trend


With the compact and stylish appearance, greatly saves users' space, leads the All-in-One Trend.


Varied Peripherals

6 USB ports, 1 serial port and 1 parallel port, compatible with lots of peripherals



Connectivity

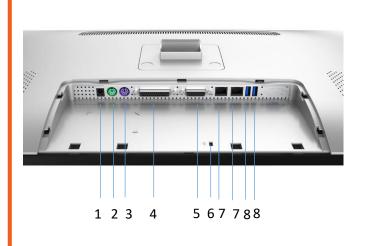

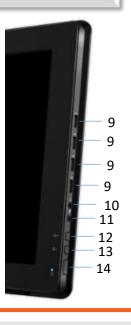

- 1. DC 19V input
- 2. PS/2 Mouse
- 3. PS/2 Keyboard
- 4. Parallel Port
- 5. Serial Port
- 6. Kensington Lock hole
- 7. RJ-45
- 8. USB 3.0 Ports
- 9. USB 2.0 Ports
- 10. Line-out
- 11. Mic-in
- 12. Brightness Up
- 13. Brightness Down
- 14. Power Button

Website: <u>www.centerm.com</u> E-mail: ctsales@cente

SPECIFICATION



SYSTEM	
Processor	Intel 2.4GHz Dual Core
Available Operating System	WES 7 / WES 8 / Win 10 IOT
Management	CCCM
MEMORY	
RAM (DDR3)	2GB (Max up to 8GB)
Storage (SSD)	mSATA 8GB (Max up to 128GB), optional 2.5" hard disk
DISPLAY	
Screen	18.5"
Resolution	1366 * 768, VGA up to 2560 *1600 @ 60Hz (optional)
NETWORK	
LAN	x2 (10/100/1000 Base-T Fast Ethernet, RJ-45)
WLAN	Optional Mini PCI-E wireless
I/O PERIPHERAL INTERFACE	
USB Port	x 6 (side: USB 2.0 x 4, rear: USB 3.0 x 2)
RJ-45	x 2
PS/2 Port	x 2
Parallel Port	x 1
Serial Port	x 1 (extensible to 4 via cable)
CAMERA	
Camera	Optional, 2-megapixel embedded camera
AUDIO	
Port	Mic-in x 1, Line-out x 1
DIMENSION	
Device (including stand)	385mm x 485.2mm x 206mm
Packaging	574mm x 226mm x 464mm
Net Weight	5.51kg
POWER	
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/5A DC
Power Consumption	20.52w
MOUNTING	
Stand	Vertical feet standard/ Wall mounted
Security	Standard Kensington anti-theft keyhole
ENVIRONMENT	
Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

^{© 2017} Fujian Centerm Co., LTD. The information contained herein is subject to change without notice. Centerm shall not be liable for technical or editorial errors or omissions contained herein.

Website: <u>www.centerm.com</u> E-mail: ctsales@centerm.com